



HAGLUND INDUSTRI

# REFRIGERATED COUNTERS

2024



HAGLUND INDUSTRI  
KYLA | ALLA FORMER



# 150 YEARS OF INNOVATION CAN BE SEEN IN THE DETAILS

For five generations, the Haglund family has had its own production at the factory in Sweden. From the early sheet metal workshop to today's high-quality refrigerators, the basic recipe has remained the same: listen to customers, pay attention to details and never stop developing technology and functionality. This tradition is what's built into all our products, giving them a finish and durability that makes us slightly unique. The products are also thoroughly tested, first by us and then by our customers. Try for yourself and notice the difference.

## FEEL FREE TO CONTACT US FOR A ESTIMATE

Every restaurant and hospitality establishment has its own needs and specific requirements. We are happy to help you find a solution that suits your needs the best. Call or email us and tell us what you need and we will give you a proposal and ON REQUEST.

**EMAIL US: SALES@HAGLUNDINDUSTRI.SE**

**OR CALL: +46 (0) 321-29 990**

### 3 REFRIGERATED COUNTERS

5 MODULAR REFRIGERATED COUNTERS

9 ACCESSORIES MX

11 FREEZER COUNTER

12 REFRIGERATED PIZZA COUNTER

13 REFRIGERATED COUNTER FOR GRILL TOP

16 COUNTERTOP PREP REFRIGERATOR



**HAGLUND  
INDUSTRI**  
KYLA I ALLA FORMER

# REFRIGERATED COUNTERS

**MX MODULAR REFRIGERATION COUNTERS / FREEZER COUNTER / REFRIGERATED PIZZA COUNTER / REFRIGERATED GRILL COUNTER / COUNTERTOP PREP REFRIGERATOR / REFRIGERATED DRAWER UNIT / REFRIGERATED BAR COUNTER / COOLING WELL / SELECTION REFRIGERATOR**

OUR MX COUNTER SERIES HAS BEEN DEVELOPED AND REFINED OVER MANY YEARS. OUR GOAL HAS BEEN TO DEVELOP THE MOST ENERGY-EFFICIENT COUNTERS ON THE MARKET WITH A BUILD QUALITY WE ARE PROUD OF. THE MATERIALS WE USE ARE ALWAYS HIGH QUALITY AND OPTIMISED FOR THE LOWEST POSSIBLE ENERGY CONSUMPTION. WE WANT TO MAKE SURE THAT OUR PROFESSIONAL KITCHEN CUSTOMERS HAVE THE BEST TOOLS FOR SUCCESSFUL, HIGH-QUALITY COOKING! MX IS MADE IN SWEDEN, LIKE EVERYTHING AT HAGLUND INDUSTRI!

## MX - MODULAR COUNTER: YOU TAILOR THEM TO YOUR NEEDS



### FULL FLEXIBILITY

Refrigerated counters are built according to customer requirements and can be equipped with drawers and doors in the desired combinations. Countertops can be supplied with cooling wells, prep refrigerators sinks, ice boxes, etc. The counters are equipped with built-in cooling units or for different types of refrigerants.

### DRAWERS WITH SOLID BOTTOM

Boxes for Gastronorm containers or for various types of bottles fitted with heavy-duty stainless steel fully extendable runners and magnetic strips.

### PROPRIETARY COOLING SYSTEM

Automated control of the refrigerated counters which are equipped with an electronic temperature control with digital temperature display. The temperature control regulates the temperature and defrosting.

### EVEN COOLING

The units are equipped with fan coolers that provide an even temperature throughout the counter's cooling area. The positioning of the cooling elements depends on the design and length of the refrigerated counter.

### EASILY TO REPLACE MAGNETIC STRIPS

Sturdy doors fitted with an easy-to-replace magnetic strips. The interior includes movable guides, where gastronorm containers can be placed directly, or can be fitted with stainless steel grid shelving.

### STAINLESS STEEL FRAME

Interior and exterior covering is in stainless steel, and of course the telescopic runners are also made from stainless steel.



## 4 REASONS FOR REFRIGERATED COUNTERS

### 1. MADE ENTIRELY OF STAINLESS STEEL

A refrigerated counter is often used extensively and should last for many years. Our counters are robustly built entirely in stainless steel to withstand the tough demands of kitchen and bar environments.

### 2. HEAVY DUTY STAINLESS STEEL FITTINGS

Telescopic runners are always made in stainless steel and have a very strong design, with a payload rating of 60kg in the extended position as standard.

### 3. EFFICIENT COOLING SYSTEM

All our products are extensively tested in harsh environments and we have developed a proprietary technology to effectively cool the compressor and ensure a long product life.

### 4. SELF-CLOSING/SOFT CLOSING

Most drawers are available with an optional self-closing / soft-closing mechanism.



MG1D  
120A



MG1D  
160A



MG1T  
160A



MD2D  
180A



MX - MODULAR  
COUNTERS



REFRIGERATED  
COUNTER WITH GN1/6  
COUNTERTOP PREP  
REFRIGERATOR




# MODULAR REFRIGERATED COUNTERS



**MX - MODULAR COUNTERS**

## MX - MODULAR COUNTERS

The modular refrigerated counters are available in any size allowing door and drawer modules of different types to be combined in the desired design. The total width of the refrigerated counter can be adjusted if the assembled parts do not match the desired dimensions.

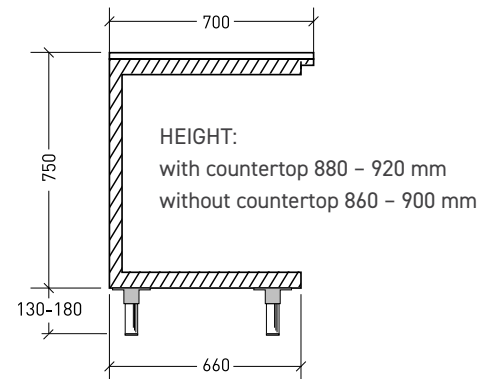

## STEP 1: CHOOSE THE COOLING SYSTEM

### CHOICE OF COOLING SYSTEM MODULE - FRONT

#### REMOTE COOLING UNIT

MODEL	DIM (mm)
REFRIGERATED COUNTER UP TO 3 MODULES	150
REFRIGERATED COUNTER 4-5 MODULES	4x5x250
FREEZER COUNTER REMOTE COOLING UNIT	150
TECHNICAL COMPARTMENT PLACED ON THE RIGHT SIDE	
CO2	350



#### BRINE

MODEL	DIM (mm)
REFRIGERATED COUNTER TO 3 MODULES*	250
REFRIGERATED COUNTER 4-5 MODULES	
REFRIGERATED COUNTER 6 MODULES	
COOLING SYSTEM MODULE PLACED ON THE RIGHT	

\*(Delivered with a 2 way Solenoid valve and an air release valve)



#### BUILT-IN UNIT

MODEL	DIM (mm)
REFRIGERATED COUNTER UP TO 3 MODULES	450
REFRIGERATED COUNTER 4-5 MODULES	450
REFRIGERATED COUNTER 6 MODULES	
FREEZER COUNTER	500
TECHNICAL COMPARTMENT PLACED ON THE RIGHT SIDE	
UNIT THAT ALSO POWERS REFRIGERATED DISPLAY	
WATER-COOLED UNIT	
ENVIRONMENTALLY FRIENDLY REFRIGERANT R-290**	

\*\* (Not countertop prep refrigerator/cooling well)



**NEW!**  
Now with the  
eco-friendly R-290  
refrigerant!

# MODULAR REFRIGERATED COUNTERS

## STEP 2: CHOOSE THE MODULES

### CHOICE OF DOORS - FRONT

#### DOORS

MODEL	DIM (mm)
SHELF DIMENSIONS, DOOR: 325x530 GN1/1	400
SHELF DIMENSIONS, DOOR: 450x530	520
SHELF DIMENSIONS, DOOR: 530x530	600
DOOR FOR BAKERY TRAYS: 450x600 (DEPTH = 700)	520
NEUTRAL DOOR	

**DOORS (400, 520 & 600) ARE DELIVERED WITH:** 1 mm STAINLESS STEEL FRONT / GN-ADAPTED DEPTHWISE / 2 STAINLESS STEEL ANTI-TIP SHELVES / RECESSED HANDLES

**DOORS FOR BAKERY TRAYS ARE DELIVERED WITH:** 1 mm STAINLESS STEEL FRONT / ADAPTED FOR BAKERY TRAYS 450x600 mm / (COUNTER DEPTH=700 mm) / SUPPLIED WITH PLASTIC OR STAINLESS STEEL GUIDES / RECESSED HANDLES

#### EXTRA EQUIPMENT

SHELF 325x530 INCL. GUIDES GN1/1
SHELF 450x530 INCL. GUIDES
SHELF 530x530 INCL. GUIDES
CYLINDER LOCK
GLASS DOOR (INSULATED GLASS) INCL. LIGHTING





#### DRAWERS GN1/1

MODEL	DIM (mm)
DRAWER TO FIT GN 1/1 GASTRONORM CONTAINER DEPTHWISE, 2 IN HEIGHT	400
DRAWER TO FIT GN 1/1 GASTRONORM CONTAINER DEPTHWISE, 3 IN HEIGHT	400
DRAWER TO FIT GN 1/1 GASTRONORM CONTAINER DEPTHWISE, 4 IN HEIGHT	400
DRAWER TO FIT GN 1/1 GASTRONORM CONTAINER IN WIDTH, 2 IN HEIGHT	600
DRAWER TO FIT GN 1/1 GASTRONORM CONTAINER IN WIDTH, 3 IN HEIGHT	600
DRAWER TO FIT GN 1/1 GASTRONORM CONTAINER IN WIDTH, 4 IN HEIGHT	600
DISHWASHER RACK DRAWER	
NEUTRAL DOOR	

**DRAWERS DELIVERED WITH:** 1 mm STAINLESS STEEL FRONT / FITTINGS IN STAINLESS STEEL / FULLY EXTENDABLE DRAWERS / IN THE EXTENDED POSITION, EACH DRAWER CAN WITHSTAND A LOAD OF 60 KG / RECESSED HANDLES / SOLID DRAWER BOTTOM

#### EXTRA EQUIPMENT

PAINTED FRONT FRAME IN ANY COLOUR
GLASS DRAWER FRONT, (STAINLESS STEEL EXTERNAL HANDLES) incl. LED

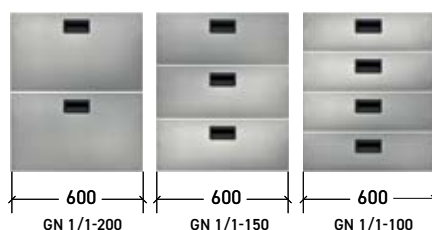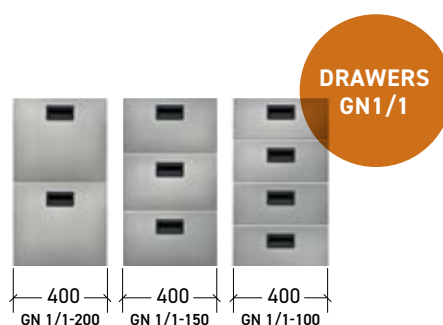


## BAR DRAWERS

MODEL	DIM (mm)
DRAWERS FOR BOTTLES, 1 BEVERAGE CRATE/DRAWER	375
DRAWERS FOR BOTTLES, 2 BEVERAGE CRATE/DRAWER	505
LOCKING MODULE, 1 LOCK, 1-2 DRAWER ROW(S)	50

**DRAWERS DELIVERED WITH:** 1 MM STAINLESS STEEL FRONT / FITTINGS IN STAINLESS STEEL / FULLY EXTENDABLE DRAWERS / IN THE EXTENDED POSITION, EACH DRAWER CAN WITHSTAND A LOAD OF 68 KG / RECESSED HANDLES / FULLY WELDED DRAWER BOTTOM

### EXTRA EQUIPMENT



BAR DRAWER TYPE 1	STANDARD
BAR DRAWER TYPES 2- 4	
GLASS DRAWER FRONT, (STAINLESS STEEL EXTERNAL HANDLES) incl. LED	



**HEIGHT INTERIOR**  
250 mm-upper  
310 mm-lower

## CONFIGURATION EXAMPLES BAR DRAWERS



### TYPE 1

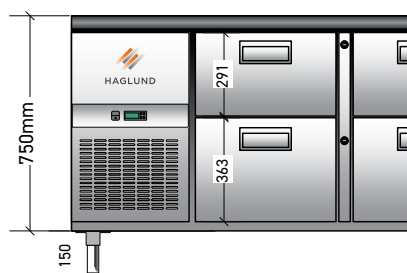

Space for 2 standard beverage crates 400x270x240 mm  
Or loose bottles with a maximum height of 250 mm  
(235 mm if LED lighting)

Space for 2 standard beverage crates 400x270x240 mm  
Or loose bottles with a maximum height of 310 mm



### TYPE 2

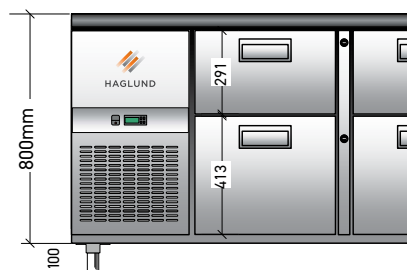

Space for 2 standard beverage crates 400x270x240 mm  
Or loose bottles with a maximum height of 250 mm  
(235 mm if LED lighting)

Space for 2 standard beverage crates 400x270x240 mm  
Or loose bottles with a maximum height of 360 mm



### TYPE 3

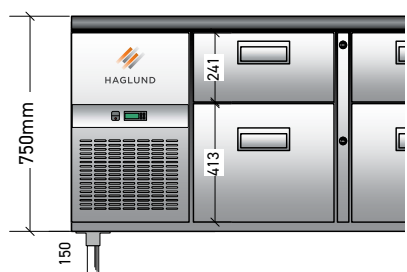

Space for loose bottles/cans with maximum height of 200 mm  
(185 mm if LED lighting)

Space for 2 standard beverage crates 400x270x240 mm  
Or loose bottles with a maximum height of 360 mm

### TYPE 4

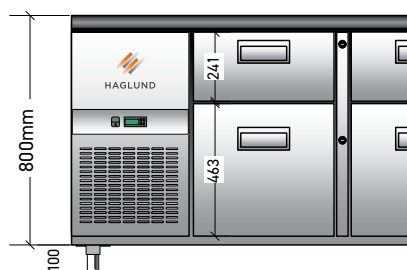

Space for loose bottles/cans with maximum height of 200 mm  
(185 mm if LED lighting)

Space for 2 standard beverage crates 400x270x240 mm  
Or loose bottles with a maximum height of 410 mm

# MODULAR REFRIGERATED COUNTERS


## STEP 3: CHOOSE COUNTERTOP

### CHOICE OF COUNTERTOP - THE CHERRY ON TOP!

#### SMOOTH STAINLESS STEEL COUNTERTOP

MODEL	LENGTH (mm)	500 - 700 mm DEPTH	701 - 800 mm DEPTH
COUNTERTOP	0-800	-	-
COUNTERTOP	801-1200	-	-
COUNTERTOP	1201-1600	-	-
COUNTERTOP	1601-2000	-	-
COUNTERTOP	2001-2400	-	-
COUNTERTOP	2401-2950	-	-
COUNTERTOP	2951-3400	-	-
COUNTERTOP	3401-3800	-	-

**COUNTERTOP DELIVERED WITH:** THE COUNTERS ARE FULLY GLUED ONTO WATER-RESISTANT ADHESIVE CHIPBOARD. COUNTER THICKNESS = 20 mm FRONT EDGE = 46 mm

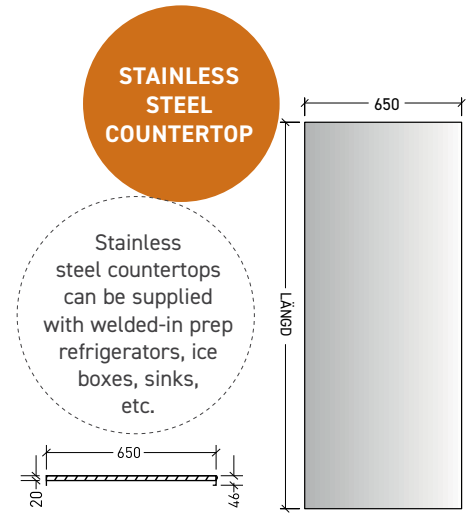

### CHOICE OF SINK & ICE BIN - COUNTERTOP ACCESSORIES

#### WELDED-IN SINK

MODEL	DIMENSIONS (mm)
WELDED-IN SINK	235x330
WELDED-IN SINK (+50MM IF PLACED ABOVE UNIT)	290x350
OTHER SINKS (L34,BE50,BE55)	
STRAINER BASKET	

#### INSULATED ICE BIN

MODEL	DIMENSIONS (mm)
INSULATED (ICE BIN)	235x330
WELDED-IN INSULATED ICE BIN	250x400
ICE BIN/WELL - CUSTOM MEASURES	





#### FULLY WELDED PREP REFRIGERATOR/WELL IN COUNTERTOP

LENGTH (MM)	*COOLING WELL	*PREP FRIDGE	*INCLINED PREP FRIDGE	BOTTLE FRIDGE
	GN1/1	GN1/6	RAISED 1/6	INCLINED
0-800	-	-	-	-
801-1200	-	-	-	-
1201-1600	-	-	-	-
1601-2000	-	-	-	-
2001-2400	-	-	-	-
2401-2950	-	-	-	-



#### EXTRA EQUIPMENT

INCLINED RAISED GN1/3 INSTEAD OF GN1/6
SPEEDRACK
COUNTERTOP SUSHI REFRIGERATOR WITH LIGHTING
COUNTERTOP SUSHI REFRIGERATOR WITHOUT LIGHTING

\*Including cooling circuit in well  
Prices include separate control of the well

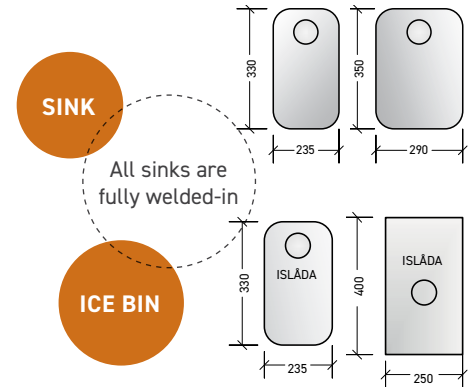

**COUNTERTOP PREP REFRIGERATOR**

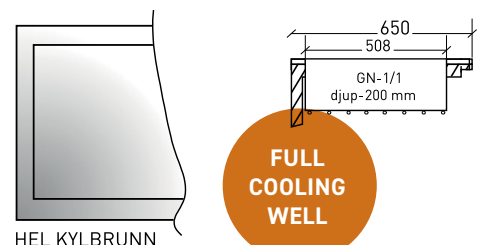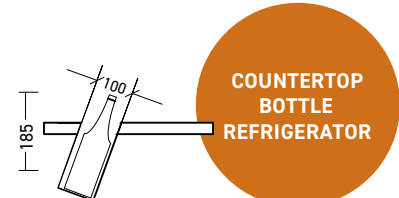



# ACCESSORIES MODULAR REFRIGERATED COUNTERS

## MODULAR REFRIGERATED COUNTERS

### EXTRA EQUIPMENT FOR ALL MX MODULES

HIGH BACK EDGE 60 mm (EDGE 10) / METRE
HIGH END EDGE 10
WHEELS INSTEAD OF LEGS
FOR PLACEMENT ON PLINTH
PLEXIGLASS LID FOR COUNTERTOP PREP REFRIGERATOR GN1/6 800-1700
PLEXIGLASS LID FOR COUNTERTOP PREP REFRIGERATOR GN1/6 1701-2150
PLEXIGLASS LID FOR COUNTERTOP PREP REFRIGERATOR GN1/6 2151-3000
AISI316 STAINLESS STEEL
PASS-THROUGH REFRIGERATED COUNTER
ELECTRONIC HEIGHT-ADJUSTMENT
PAINTED FRONT (RAL)
PAINTED END (RAL)
GLASS TOP / INSULATED GLASS
GLASS TOP / INSULATED GLASS WITH SLIDING DOORS
CHROMED SURFACE COOLING TUBES (SUSHI) WITH SEP. CONTROL UNIT
GN FRAME
EXTERNAL HANDLES
DOORS/DRAWERS FOR CARPENTRY FRONT
PAINTED REFRIGERATED COUNTER BASIC
PAINTED REFRIGERATED COUNTER /M
PAINTED REFRIGERATED COUNTER /DRAWERS
PAINTED REFRIGERATED COUNTER /DOORS
CARPENTRY FRONT UNIT DOOR
REFRIGERATED COUNTERTOP

## CHANGE REFRIGERATED COUNTER DIMENSIONS

### MODEL

DEPTH ≤ 650 mm	
DEPTH 700 mm	STANDARD
DEPTH 800 mm	
LENGTH +50, 100, 150 mm	
LENGTH +200, 250, 300 mm	
UNUSUAL LENGTHS	
OTHER HEIGHT	
MIXED MODULES (GN / BAR / BAKERY)	



## TECHNICAL DATA

### BUILT-IN UNIT

MODEL	POWER SUPPLY	CONNECTED POWER	REFRIGERANT
MX REFRIGERATED COUNTER	230V / 10A	MAX 800W	R-290

### REMOTE COOLING UNIT

MODEL	POWER SUPPLY	CONNECTED POWER	COOLING REQUIREMENT (W)	REFRIGERANT
MX GN-REFRIGERATED COUNTER	230A / 10A	MAX 500W	50W+150W/m	R-134a/R-452A*
BAR REFRIGERATED COUNTER MX-B	230A / 10A	MAX 500W	75W+190W/m	R-134a/R-452A*
COUNTERTOP PREP REFRIGERATOR GN1/6	-	-	30W/m	R-134a/R-452A*
COOLING WELL GN1/1	-	-	70W/m	R-134a/R-452A*

### BRINE

MODEL	POWER SUPPLY	CONNECTED POWER	COOLING REQUIREMENT (l/s)
MX REFRIGERATED COUNTER	230A / 10A	MAX 500W	UPON REQUEST

\*CO2 or other refrigerant can be supplied upon request.

# CONFIGURATION EXAMPLES


## REFRIGERATED COUNTERS WITH INCLINED COUNTERTOP

### BUILT-IN UNIT

MODEL	DOORS	DRAWER MODULES	DIM (mm)
MX-08A0	1	0	850x650x880-920
MX-08A1	0	1	850x650x880-920
MX-12A0	2	0	1250x650x880-920
MX-12A1	1	1	1250x650x880-920
MX-12A2	0	2	1250x650x880-920
MX-16A0	3	0	1650x650x880-920
MX-16A1	2	1	1650x650x880-920
MX-16A2	1	2	1650x650x880-920
MX-16A3	0	3	1650x650x880-920
MX-20A0	4	0	2050x650x880-920
MX-20A1	3	1	2050x650x880-920
MX-20A2	2	2	2050x650x880-920
MX-20A3	1	3	2050x650x880-920
MX-20A4	0	4	2050x650x880-920


**STANDARD:** MADE ENTIRELY OF STAINLESS STEEL / 2 STAINLESS STEEL GN GRID SHELVES PER DOOR / GN ADAPTED / FULLY WELDED DRAWERS / CONDENSATE EVAPORATOR

Price reduction for counters without a countertop



REFRIGERATED COUNTERS WITH STAINLESS STEEL COUNTERTOP

### CONFIGURATION EXAMPLES

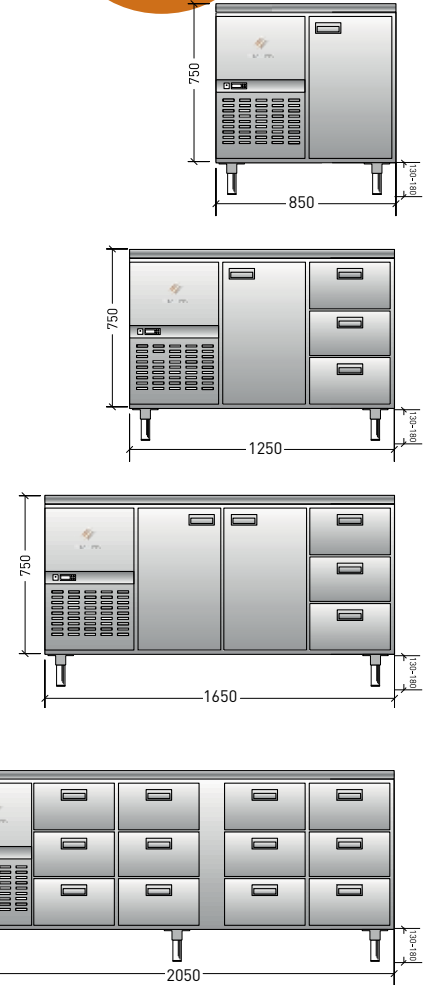

## TECHNICAL DATA

### BUILT-IN UNIT

MODEL	POWER SUPPLY	CONNECTED POWER	REFRIGERANT
MX-08A	230 V / 10 A	500 W	R-290
MX-12A	230 V / 10 A	500 W	R-290
MX-16A	230 V / 10 A	550 W	R-290
MX-20A	230 V / 10 A	600 W	R-290

### REMOTE COOLING UNIT

MODEL	POWER SUPPLY	CONNECTED POWER	COOLING REQUIREMENT (W)	REFRIGERANT
MX-08C	230 V / 10 A	100 W	200/-10°C	R-134a
MX-12C	230 V / 10 A	100 W	250/-10°C	R-134a
MX-16C	230 V / 10 A	100 W	300/-10°C	R-134a
MX-20C	230 V / 10 A	100 W	350/-10°C	R-134a

\*CO2 or other refrigerant can be supplied upon request.

# FREEZER COUNTER

## FREEZER COUNTER

### BUILT-IN UNIT

MODEL	SHELVES	DOORS	LENGTH(mm)
MF-90A	325x530	1	900x650x900
MF-130A	325x530	2	1300x650x900
MF-150A	450x530	2	1500x650x900

### REMOTE COOLING UNIT


MODEL	SHELVES	DOORS	LENGTH(mm)
MF-60C	325x530	1	600x650x900
MF-105C	325x530	2	1050x650x900
MF-130C	450x530	2	1300x650x900

**STANDARD:** MADE ENTIRELY OF STAINLESS STEEL / FAN COOLED / AUTOMATIC DEFROST / THE COUNTER IS DELIVERED WITH 2 ADJUSTABLE SHELVES/DOORS

### EXTRA EQUIPMENT

DRAWERS BEHIND DOOR\*

\*2 DRAWERS

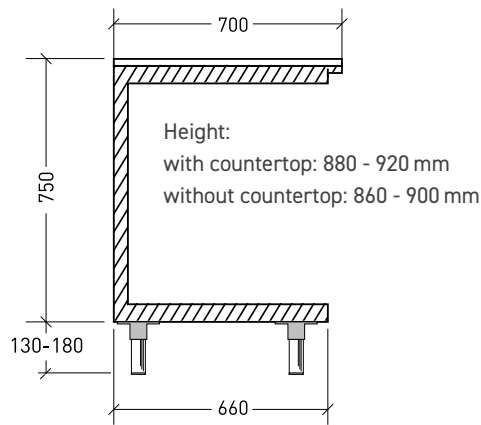

FREEZER  
COUNTER

## TECHNICAL DATA

### BUILT-IN UNIT

MODEL	POWER SUPPLY	CONNECTED POWER	REFRIGERANT
MF-90A	230 A / 10A	800 W	R-290
MF-130A	230 V / 10A	800 W	R-290
MF-150A	230 V / 10A	800 W	R-290

### REMOTE COOLING UNIT

MODEL	POWER SUPPLY	CONNECTED POWER	COOLING REQUIREMENT (W)	REFRIGERANT
MF-60C	230 V / 10A	800 W	400 / -30°C	R-452A*
MF-105C	230 V / 10A	800 W	500 / -30°C	R-452A*
MF-130C	230 V / 10A	800 W	550 / -30°C	R-452A*

\*CO2 or other refrigerant can be supplied upon request.



# REFRIGERATED PIZZA COUNTER

## REFRIGERATED PIZZA COUNTER

### BUILT IN UNIT, SMOOTH STAINLESS STEEL COUNTERTOP, NO PREP FRIDGE

MODEL	DOORS	LENGTH (mm)
MP-165A	2	1650x790x900
MP-210A	3	2100x790x900
MP-260A	4	2600x790x900


### BUILT-IN UNIT, LAMINATED COUNTERTOP, INCLINED PREP FRIDGE

MODEL	DOORS	DIM (mm)
MPR-165A	2	1650x810x900
MPR-210A	3	2100x810x900
MPR-260A	4	2600x810x900

**STANDARD:** INTERIOR AND EXTERIOR IN STAINLESS STEEL / AUTOMATIC DEFROST / PLASTIC GUIDES ADAPTED TO BAKERY TRAYS / LAMINATED COUNTERTOP / COUNTERTOP PREP REFRIGERATOR WITH SEPARATE CONTROL / ADAPTED TO BAKERY TRAYS 450 x 600 / 7 PAIRS OF GUIDES CC = 75 mm

#### EXTRA EQUIPMENT

PLEXIGLASS LID FOR COUNTERTOP, 1650 mm
PLEXIGLASS LID FOR COUNTERTOP 2100 mm
PLEXIGLASS LID FOR COUNTERTOP 2600 mm
STAINLESS STEEL INTERIOR GUIDES
MARBLE COUNTERTOP
ADAPTED TO BAKERY TRAYS 400x600

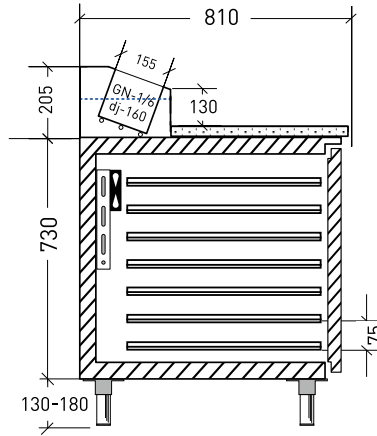

REFRIGERATED PIZZA COUNTER

#### EVEN COOLING

Refrigerated pizza counter with high pressure laminate top. Equipped with prep refrigerator with a separate controller and cooling system. The counter is fan-cooled which give an even and effective cooling.

## TECHNICAL DATA

### BUILT-IN UNIT

MODEL	POWER SUPPLY	CONNECTED POWER	REFRIGERANT
MP-165A	230 V / 10 A	500 W	R-290
MP-210A	230 V / 10 A	550 W	R-290
MP-260A	230 V / 10 A	700 W	R-290

### REMOTE COOLING UNIT

MODEL	POWER SUPPLY	CONNECTED POWER	COOLING REQUIREMENT (W)	REFRIGERANT
MP-165C	230 V / 10 A	145 W	350 / -10°C	R-452A*
MP-210C	230 V / 10 A	145 W	500 / -10°C	R-452A*
MP-260C	230 V / 10 A	170 W	700 / -10°C	R-452A*

\*CO2 or other refrigerant can be supplied upon request.

# REFRIGERATED COUNTER FOR GRILL TOP

## REFRIGERATED COUNTER GASTRONORM CONTAINER CROSSWISE


### BUILT-IN UNIT - GN 1/1 -150 GASTRONORM CONTAINER, DEPTH = 600 mm

MODEL	DRAWERS	LENGTH (mm)
MG1T-120A	2	1200x600x600
MG1T-160A	4	1600x600x600
MG1T-220A	6	2200x600x600
MG1T-280A	8	2800x600x600

**STANDARD:** INTERIOR AND EXTERIOR IN STAINLESS STEEL / STAINLESS STEEL TELESCOPIC RUNNERS / AUTOMATIC DEFROST / BUILT-IN COOLING UNIT / FAN COOLER / ELECTRIC CONDENSATE EVAPORATOR / ECO FRIENDLY REFRIGERANT R-290

#### EXTRA EQUIPMENT SPECIAL DIMENSIONS

PLEASE NOTE! GASTRONORM CONTAINERS ARE NOT INCLUDED

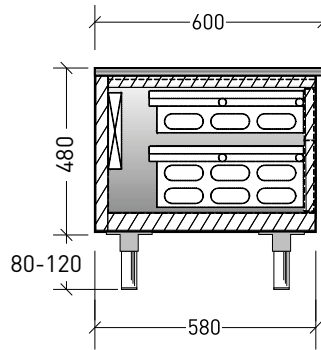

**MG1T-160A**  
REFRIGERATED  
GRILL COUNTER WITH  
GASTRONORM  
CONTAINERS  
CROSSWISE

DELIVERED WITH  
ECO-FRENDLY R-290  
REFRIGERANT!

## TECHNICAL DATA

### BUILT-IN UNIT

MODEL	POWER SUPPLY	CONNECTED POWER	REFRIGERANT
MG1T-120A	230 V/10 A	500 W	R-290
MG1T-160A	230 V/10 A	500 W	R-290
MG1T-220A	230 V/10 A	550 W	R-290
MG1T-280A	230 V/10 A	650 W	R-290

### REMOTE COOLING UNIT

MODEL	POWER SUPPLY	CONNECTED POWER COOLING	REQUIREMENT (W)	REFRIGERANT
MG1T-120C*	230 V/10 A	150 W	200/-10°C	R-134a/R-452A*
MG1T-160C*	230 V/10 A	150 W	300/-10°C	R-134a/R-452A*
MG1T-220C*	230 V/10 A	150 W	400/-10°C	R-134a/R-452A*
MG1T-280C*	230 V/10 A	150 W	500/-10°C	R-134a/R-452A*

\*CO2 or other refrigerant can be supplied upon request.

# REFRIGERATED COUNTER FOR GRILL TOP

## REFRIGERATED COUNTER GASTRONORM CONTAINER DEPTHWISE

### BUILT-IN UNIT - GN1/1-150 GASTRONORM CONTAINER DEPTHWISE, DEPTH=700 mm


MODEL	DRAWERS	LENGTH (mm)
MG1D-120A	4	1200x700x600
MG1D-160A	6	1600x700x600
MG1D-200A	8	2000x700x600
MG1D-240A	10	2400x700x600
MG1D-280A	12	2800x700x600

**STANDARD:** INTERIOR AND EXTERIOR IN STAINLESS STEEL / STAINLESS STEEL TELESCOPIC RUNNERS / AUTOMATIC DEFROST / BUILT-IN COOLING UNIT / FAN COOLER / ELECTRIC CONDENSATE EVAPORATOR / ECO FRIENDLY REFRIGERANT R-290

#### EXTRA EQUIPMENT

SPECIAL DIMENSIONS

PLEASE NOTE! GASTRONORM CONTAINERS ARE NOT INCLUDED



**MG1D-160A**  
REFRIGERATED  
GRILL COUNTER WITH  
GASTRONORM  
CONTAINERS  
DEPTHWISE

DELIVERED WITH  
ECO-FRENDLY R-290  
REFRIGERANT!

## TECHNICAL DATA

### BUILT-IN UNIT

MODEL	POWER SUPPLY	CONNECTED POWER	REFRIGERANT
MG1D-120A	230 V/10 A	500 W	R-290
MG1D-160A	230 V/10 A	500 W	R-290
MG1D-200A	230 V/10 A	550 W	R-290
MG1D-240A	230 V/10 A	650 W	R-290
MG1D-280A	230 V/10 A	700 W	R-290

### REMOTE COOLING UNIT

MODEL	POWER SUPPLY	CONNECTED POWER	COOLING REQUIREMENT (W)	REFRIGERANT
MG1D-120C*	230 V/10 A	150 W	200/-10°C	R-134a/R-452A*
MG1D-160C*	230 V/10 A	150 W	275/-10°C	R-134a/R-452A*
MG1D-200C*	230 V/10 A	150 W	350/-10°C	R-134a/R-452A*
MG1D-240C*	230 V/10 A	150 W	425/-10°C	R-134a/R-452A*
MG1D-280C*	230 V/10 A	150 W	500/-10°C	R-134a/R-452A*

\*CO2 or other refrigerant can be supplied upon request.



# REFRIGERATED COUNTER FOR GRILL TOP

## REFRIGERATED COUNTER, GASTRONORM CONTAINER DEPTHWISE

### BUILT-IN UNIT - GN2/1-150 GASTRONORM CONTAINER DEPTHWISE, DEPTH=700 mm


MODEL	DRAWERS	LENGTH (mm)
MG2D-120A	2	1200x700x600
MG2D-180A	4	1800x700x600
MG2D-260A	6	2600x700x600

**STANDARD:** INTERIOR AND EXTERIOR IN STAINLESS STEEL / STAINLESS STEEL TELESCOPIC RUNNERS / AUTOMATIC DEFROST / BUILT-IN COOLING UNIT / FAN COOLER / ELECTRIC CONDENSATE EVAPORATOR / ECO FRIENDLY REFRIGERANT R-290

#### EXTRA EQUIPMENT

SPECIAL DIMENSIONS

PLEASE NOTE! GASTRONORM CONTAINERS ARE NOT INCLUDED



**MG2D-180A**  
REFRIGERATED GRILL  
COUNTER  
WITH GASTRONORM  
CONTAINERS  
DEPTHWISE

DELIVERED WITH  
ECO-FRIENDLY R-290  
REFRIGERANT!

## TECHNICAL DATA

### BUILT-IN UNIT

MODEL	POWER SUPPLY	CONNECTED POWER	REFRIGERANT
MG2D-120A	230 V/10 A	450 W	R-290
MG2D-180A	230 V/10 A	550 W	R-290
MG2D-260A	230 V/10 A	650 W	R-290

### REMOTE COOLING UNIT

MODEL	POWER SUPPLY	CONNECTED POWER	COOLING REQUIREMENT (W)	REFRIGERANT
MG2D-120C	230 V/10 A	150 W	250/-10°C	R-134a/R-452A*
MG2D-180C	230 V/10 A	150 W	350/-10°C	R-134a/R-452A*
MG2D-260C	230 V/10 A	150 W	450/-10°C	R-134a/R-452A*

\*CO2 or other refrigerant can be supplied upon request.

# COUNTERTOP PREP REFRIGERATOR

## COUNTERTOP PREP REFRIGERATOR

### COUNTERTOP PREP REFRIGERATOR FOR GN 1/6

MODEL	NUMBER GN-1/6	LENGTH (mm)	PLEXIGLASS LID
MKR6-1200A	4	1200x250x250	-
MKR6-1365A	5	1365x250x250	-
MKR6-1525A	6	1525x250x250	-
MKR6-1690A	7	1690x250x250	-
MKR6-1850A	8	1850x250x250	-
MKR6-2015A	9	2015x250x250	-
MKR6-2175A	10	2175x250x250	-
MKR6-2340A	11	2340x250x250	-
MKR6-2500A	12	2500x250x250	-
MKR6-2665A	13	2665x250x250	-
MKR6-2825A	14	2825x250x250	-

**STANDARD:** MADE ENTIRELY OF STAINLESS STEEL / CAN BE PLACED ON A COUNTER OR MOUNTED ON A WALL USING WALL BRACKETS / HAS A BUILT-IN UNIT OR CONNECTS TO A REMOTE COOLING UNIT

For units with Remote Cooling the total length is reduced by 300 mm

PLEASE NOTE! GASTRONORM CONTAINERS ARE NOT INCLUDED


#### EXTRA EQUIPMENT

PLEXIGLASS LID

WALL BRACKETS

CO2 \*\*

\*\*Same total length as for Built-in unit

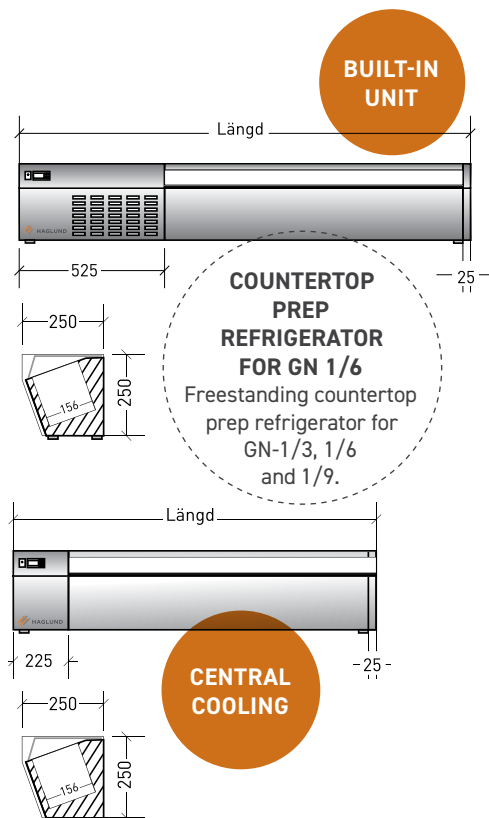

### COUNTERTOP PREP REFRIGERATOR FOR GN 1/3

MODEL	NUMBER GN-1/3	LENGTH (mm)	PLEXIGLASS LID
MKR3-1110A	4	1110x400x300	-
MKR3-1285A	5	1285x400x300	-
MKR3-1460A	6	1460x400x300	-
MKR3-1640A	7	1640x400x300	-
MKR3-1820A	8	1820x400x300	-
MKR3-1990A	9	1990x400x300	-
MKR3-2170A	10	2170x400x300	-
MKR3-2345A	11	2345x400x300	-
MKR3-2530A	12	2530x400x300	-
MKR3-2700A	13	2700x400x300	-
MKR3-2875A	14	2875x400x300	-

**STANDARD:** MADE ENTIRELY OF STAINLESS STEEL / CAN BE PLACED ON A COUNTER OR MOUNTED ON A WALL USING WALL BRACKETS / HAS A BUILT-IN UNIT OR CONNECTS TO REMOTE COOLING UNIT

For units with Remote Cooling the total length is reduced by 200 mm

PLEASE NOTE! GASTRONORM CONTAINERS ARE NOT INCLUDED


#### EXTRA EQUIPMENT

PLEXIGLASS LID

WALL BRACKETS

ADDITION FOR CO2\*\*

\*\*Same total length as for Built-in unit

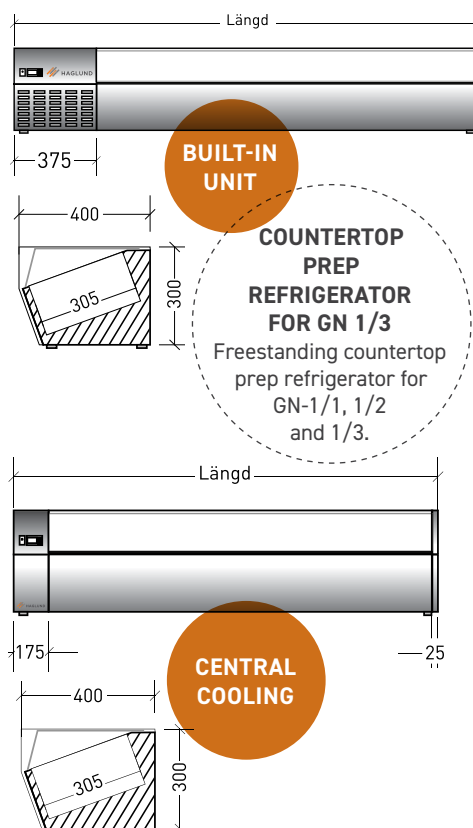

## TECHNICAL DATA

### BUILT-IN UNIT

MODEL	POWER SUPPLY	CONNECTED POWER	REFRIGERANT
MKR-1200-1990*	230 V/10 A	200 W	R-290
MKR-1995-2875*	230 V/10 A	300 W	R-290

\*Gastronorm containers not included in the

**MODULAR COLD ROOMS & FREEZER ROOMS**

**VERTICAL REFRIGERATORS & FREEZER CABINETS**

**TINA THAWING CABINET**

**BLAST CHILLER / FREEZER**


**REFRIGERATED COUNTERS**

**SERVING COOLING / HEATING**

**REFRIGERATED WALL DISPLAY**

**REFRIGERATED DISPLAYS**

**REFRIGERATED WINE & BEER DISPLAY**

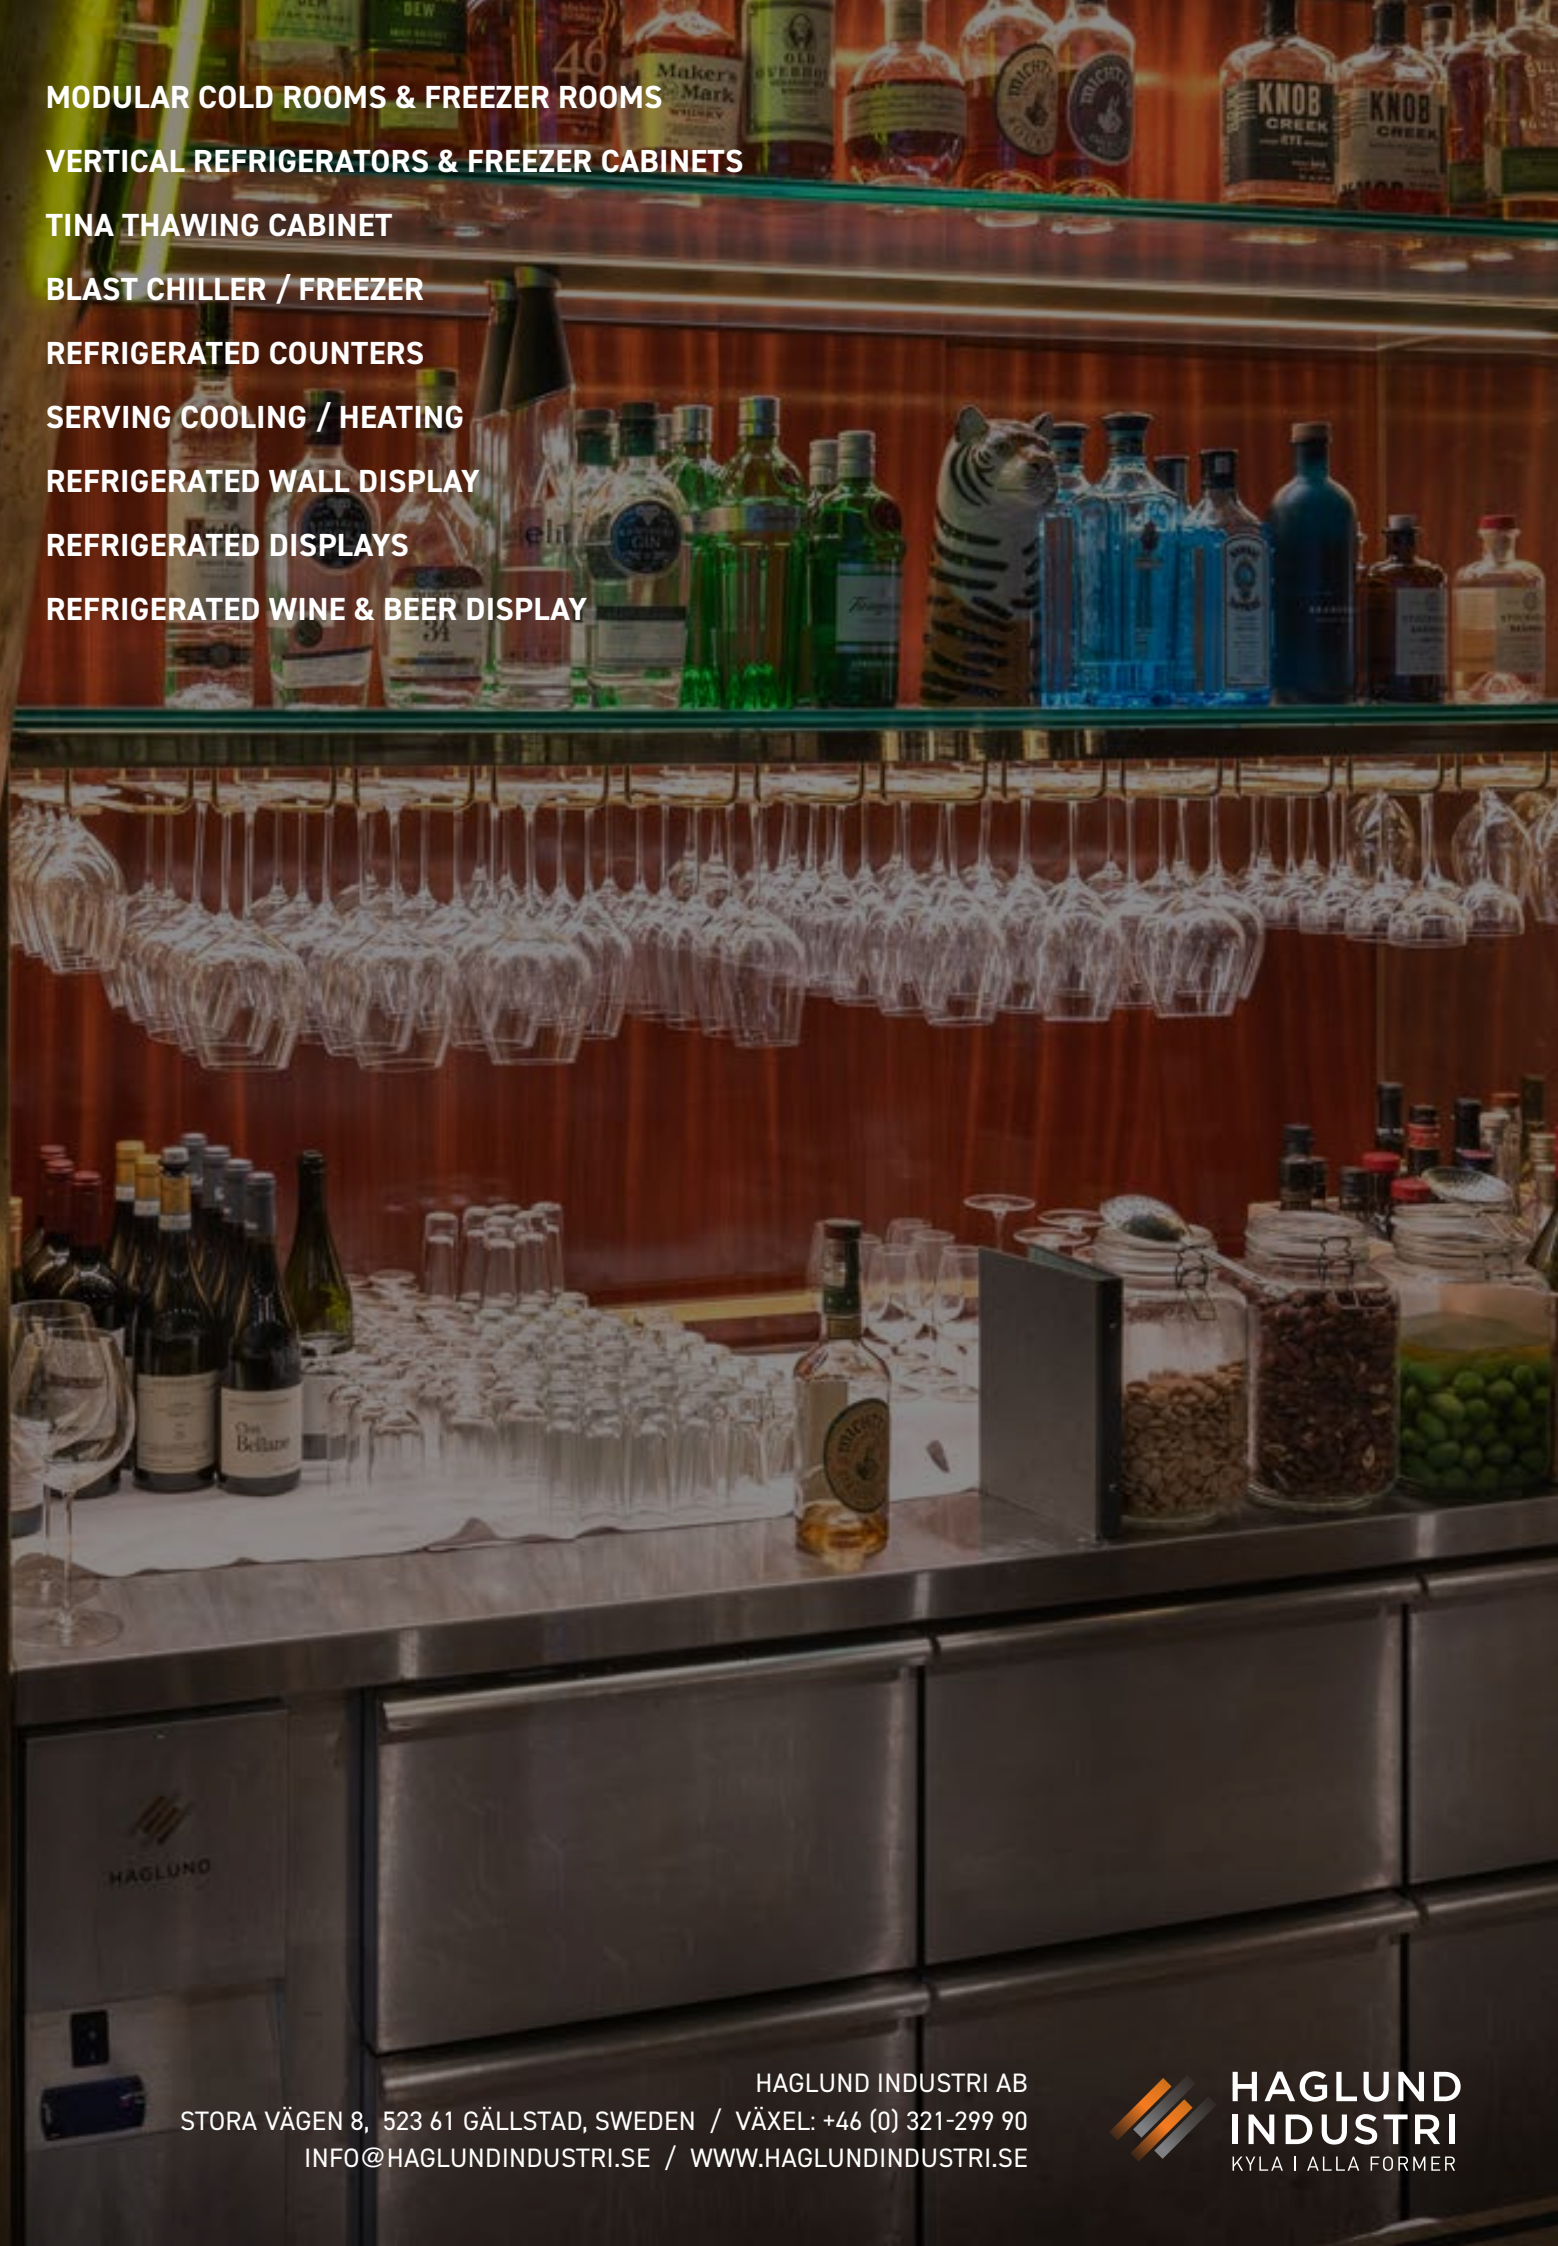

HAGLUND

HAGLUND INDUSTRI AB  
STORA VÄGEN 8, 523 61 GÄLLSTAD, SWEDEN / VÄXEL: +46 (0) 321-299 90  
INFO@HAGLUNDINDUSTRI.SE / WWW.HAGLUNDINDUSTRI.SE



**HAGLUND  
INDUSTRI**  
KYLA I ALLA FORMER